

Product Data Sheet

2018-10-11

Product : Invisible Fluorescent Materials : Red 620
Lot. No. : #120725
Main use : Gravure, flexo, letterpress, offset, screen printing inks
Supply form : Powder or Inks
*** Testing varnish type** : Modified rosin phenol resin

Chemical & Physical properties

(determined on powder)

Product name	Appearance form	Appearance color	Solubility (Water, 20℃)	Grindometer test
Red 620	Powder	Beige	0.011g/ℓ	max. ≤ 1mil

Luminescent properties


(determined on film by PL Spectrometer)

Product name	Excitation Point (nm)	Color of fluorescence	CIE-chromaticity coordinates	DWL (nm)
Red 620	365 (Abs _{max} 364)	Red	x=0.6675 y=0.3372	618 ± 5

- Excitation & Emission

(determined by PL Spectrometer)

Red 620

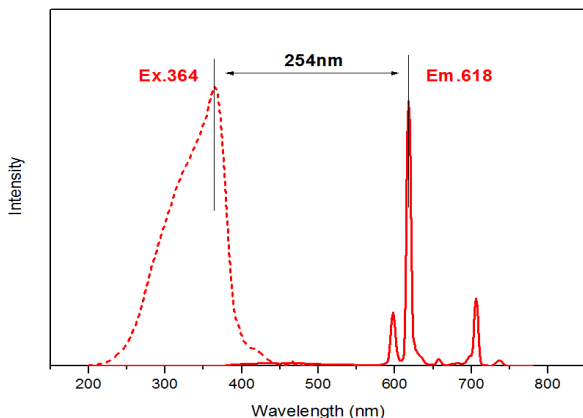

Product Data Sheet

2018-10-11

Chemical resistance test

(determined on 10% film by Visual Check or Color Difference Meter, PL Spectrometer)

- Test for Appearance Color Fastness – *Gray Scale (Color Staining)*

Product name	Red 620
Gray Scale (1-5)	≥ 4

* Gray Scale (Color Staining) = 5: dE*0.00, 4.5: dE*3.36, 4: dE*5.40, 3.5: dE*7.14, 3: dE*13.65, 2.5: dE*18.25, 2: dE*23.56, 1.5: dE*29.33, 1: dE* 34.28

- Test for Fluorescence Fastness – *Function Class (Residual Fluorescent Intensity)*

No.	Items	Function Class (1-5)	
		Red 620	
		daylight	under uv light
0	Initial		5
1	Ethyl alcohol (30min.)		5
2	Ethyl acetate (30min.)		5
3	Perchloro Ethylene (30min.)		5
4	Xylene (30min.)		5
5	Gasoline (30min.)		5
6	Acetone (30min.)		5
7	Toluene (30min.)		5
8	Acetic acid (20% Sol., 30min.)		4
9	H ₂ SO ₄ (2% Sol., 30min.)		5
10	HCl (5% Sol., 30min.)		4
11	NaOH (2% Sol., 30min.)		5
12	Soap solution (5% Sol., 80°C, 30min.)		1
13	NaOCl (5% Sol., 30min.)		5
14	Hot water (100°C, 30min.)		2
15	Artificial sweat (30min.)		4

* Function Class = 5: 100-81%, 4: 80-61%, 3: 60-41%, 2: 40-21%, 1: 20-1%

Above picture may be different from the original.

Product Data Sheet

2018-10-11

Light fastness test

(determined on 10% film by Visual Check or Color Difference Meter, PL Spectrometer)

- Test for Appearance Color Fastness at 100hr – *Blue Wool Scale & 20% Change from unexposed strip*


Product name	Red 620
Blue Wool Scale (1-8)	4-5
Gray Scale (Color Staining) (1-5)	2-2.5

* Gray Scale (Color Staining) = 5: dE*0.00, 4.5: dE*3.36, 4: dE*5.40, 3.5: dE*7.14, 3: dE*13.65, 2.5: dE*18.25, 2: dE*23.56, 1.5: dE*29.33, 1: dE* 34.28

- Test for Fluorescence Fading at 100hr - *Function Class (Residual Fluorescent Intensity)*

Product name	Red 620
Function Class (1-5) at each bws	1

* Function Class = 5: 100-81%, 4: 80-61%, 3: 60-41%, 2: 40-21%, 1: 20-1%

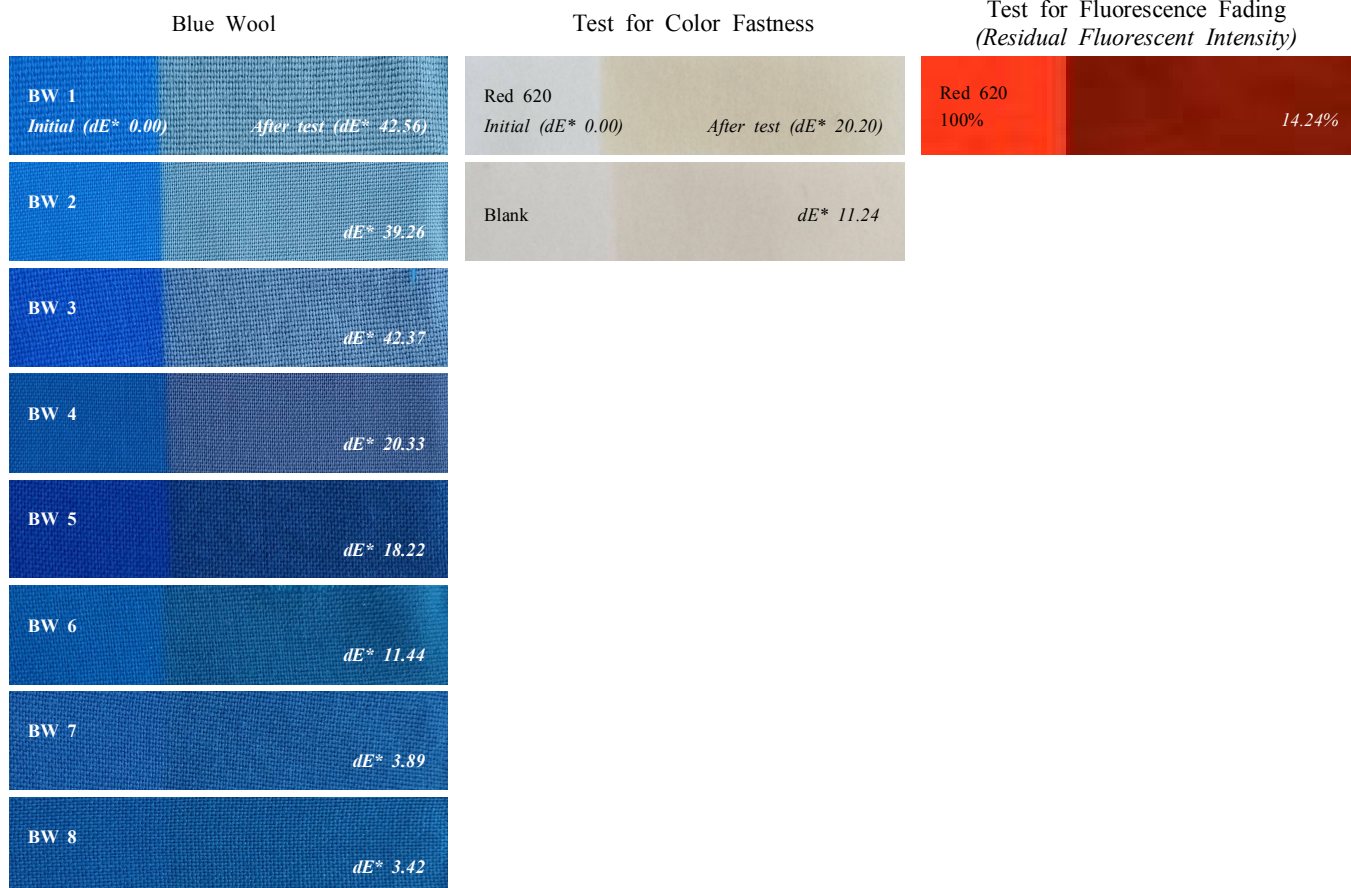

* 0.89W/m2 at 340nm(NB) uv lamp, Chamber temp. 60℃, Humidity: not controlled

Modified ASTM G154 Cycle 1 by QUV Accelerated Weathering Tester (model: Q-Lab QUV/spray)



Product Data Sheet

2018-10-11

Thermal stability test

(determined on 10% film by Visual Check or Color Difference Meter, PL Spectrometer)

- Test for Appearance Color Fastness & Residual Fluorescent Intensity

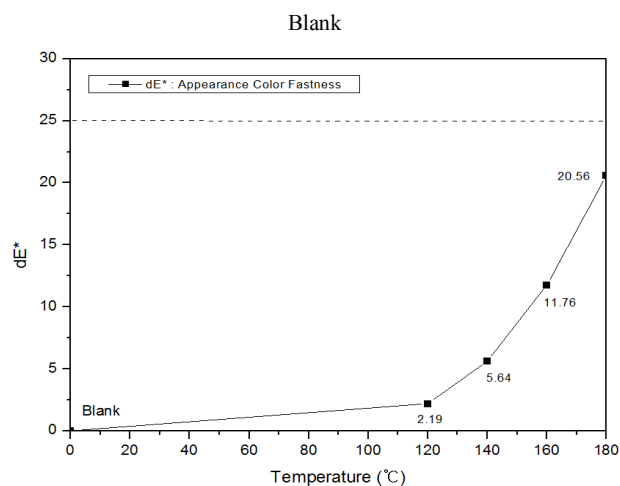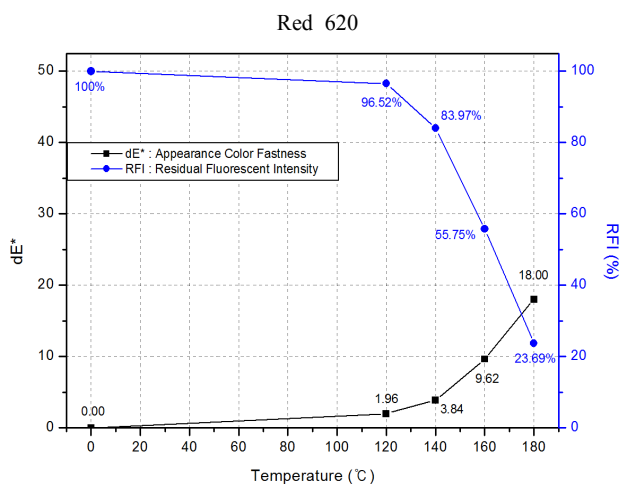

Product Data Sheet

2018-10-11

Humidity test

(determined on 10% film by Visual Check or Color Difference Meter, PL Spectrometer)

- Test for Appearance Color Fastness at 100hr – Gray Scale (Color Staining)

Product name	Red 620
Gray Scale (Color Staining) (1-5) at 100hr	3-3.5



* Gray Scale (Color Staining) = 5: dE*0.00, 4.5: dE*3.36, 4: dE*5.40, 3.5: dE*7.14, 3: dE*13.65, 2.5: dE*18.25, 2: dE*23.56, 1.5: dE*29.33, 1: dE* 34.28

- Test for Fluorescence Fading at 100hr - Function Class (Residual Fluorescent Intensity)

Product name	Red 620
Function Class (1-5) at 100hr	4

* Function Class = 5: 100-81%, 4: 80-61%, 3: 60-41%, 2: 40-21%, 1: 20-1%

- Test for Appearance Color Fastness & Residual Fluorescent Intensity

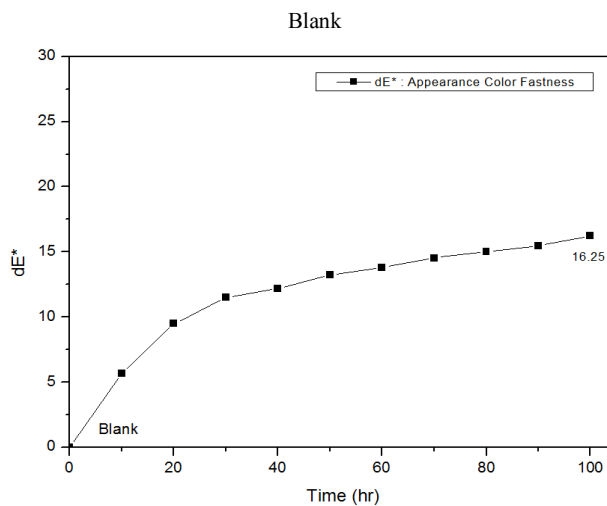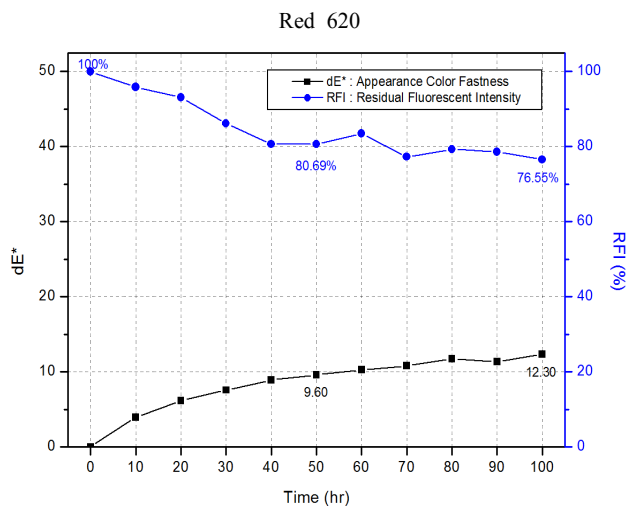

* Temperature 80℃, Relative humidity 80% (model: Jeio Tech, TH-G-180)